


姿図

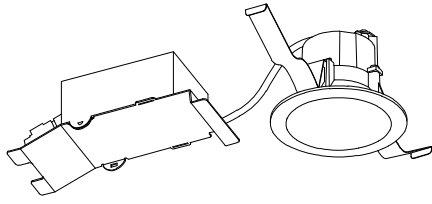

品番	DDL-5481ABG
光源	LED 7.8W 3500K
定格光束	500 lm
1/2照度角	53°
ビーム角	64°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.00 H B 1.00 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数	照 明 率 ( × 0.01 )													
0.6	78	73	70	78	73	70	77	73	70	76	72	69	68	
0.8	85	80	76	84	79	76	83	79	76	82	78	75	73	
1	91	86	82	90	85	82	88	84	81	87	83	81	79	
1.25	96	91	88	95	90	87	93	89	86	91	88	85	83	
1.5	99	95	92	98	94	91	96	92	90	93	91	88	86	
2	104	101	98	103	100	97	100	98	95	98	96	94	91	
2.5	108	105	103	106	104	101	103	101	99	100	99	97	94	
3	110	108	106	109	106	105	105	104	102	102	101	100	96	
4	113	111	109	111	109	108	107	106	105	104	103	102	98	
5	114	113	111	112	111	110	108	107	106	105	104	103	99	

