


姿図

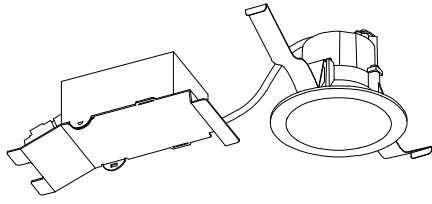

品番	DDL-5481AWG
光源	LED 7.8W 3500K
定格光束	560 lm
1/2照度角	52°
ビーム角	62°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.97 H B 0.97 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	74	69	65	74	69	65	73	68	65	72	68	65	63		
0.8	81	76	72	81	76	72	79	75	71	78	74	71	69		
1	88	82	79	87	82	78	85	81	78	83	80	77	75		
1.25	93	88	84	92	87	84	90	86	83	88	84	82	79		
1.5	97	92	88	95	91	88	93	89	87	91	88	85	83		
2	102	99	95	101	97	94	98	95	93	96	93	91	88		
2.5	106	103	100	105	102	99	101	99	97	98	97	95	91		
3	109	106	104	107	105	102	104	102	100	101	99	98	94		
4	112	109	107	110	108	106	106	104	103	102	101	100	96		
5	113	112	110	111	110	108	107	106	105	104	103	102	97		

