


姿図

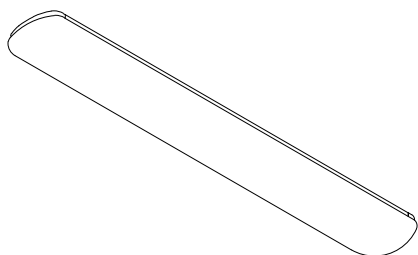

品 番	DCL-39921A
光 源	LED 28W 3500K
定格光束	3340 lm
1/2照度角	A-A' 66° B-B' 64°
ビーム角	A-A' 120° B-B' 106°

器具効率	100.0 %
上方光束	8.9 %
下方光束	91.1 %
器具間隔 最大限 (取付高さ H)	A 1.29 H B 1.24 H
保 守 率	良 0.69 中 0.67 否 0.63

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		44	35	29	42	35	29	41	33	28	39	32	28	25
0.8		53	44	38	52	43	37	49	42	36	47	40	35	32
1		61	52	45	59	51	45	56	49	43	53	47	42	38
1.25		68	60	53	66	58	52	63	56	50	59	54	49	45
1.5		74	66	59	72	64	58	68	61	56	64	59	54	50
2		83	75	69	80	73	67	76	70	65	71	66	62	57
2.5		88	81	76	86	79	74	81	75	71	76	72	68	63
3		92	86	81	90	84	79	84	80	76	79	76	72	66
4		98	92	88	95	90	86	89	85	81	84	81	78	71
5		101	96	92	98	94	90	92	88	85	86	84	81	75

A-A'

B-B'

