




品 番	LZD-9013WWW8
光 源	LED 45W 5000K
定格光束	6000 lm
1/2照度角	35°
ビーム角	40°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.65 H B 0.65 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	75	70	66	74	69	66	73	69	66	72	68	65	64	
0.8	81	76	72	81	76	72	79	75	71	78	74	71	69	
1	87	82	78	87	82	78	85	80	77	83	79	77	74	
1.25	93	87	84	91	87	83	89	85	82	87	84	81	79	
1.5	96	92	88	95	91	87	93	89	86	90	87	85	82	
2	102	98	95	101	97	94	98	95	92	95	93	90	87	
2.5	106	102	99	104	101	98	101	98	96	98	96	94	91	
3	109	106	103	107	104	102	103	101	99	100	99	97	93	
4	112	109	107	110	107	106	106	104	103	102	101	100	96	
5	113	111	110	111	110	108	107	106	105	104	103	102	97	

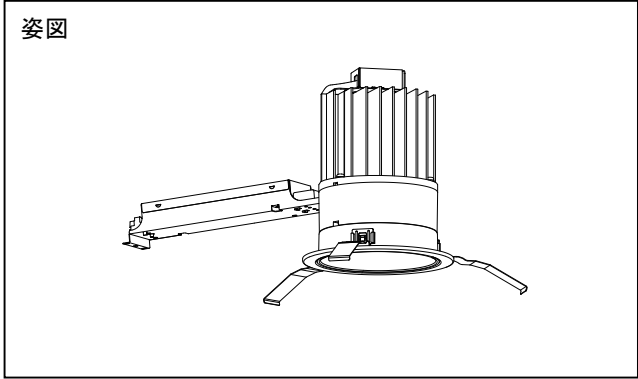