


姿図

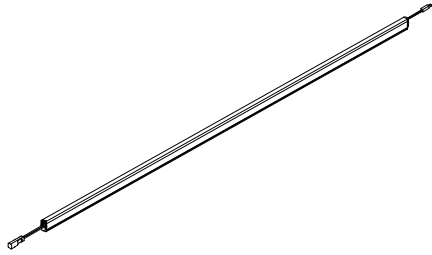



品番	LZW-93046YTW
光源	LED 10W 3000K
定格光束	350 lm
1/2照度角	A-A' 71° B-B' 63°
ビーム角	A-A' 156° B-B' 104°

器具効率	100.0 %
上方光束	16.3 %
下方光束	83.7 %
器具間隔 最大限 (取付高さH)	A 1.43 H
	B 1.23 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井			壁			床			照明率 (×0.01)										
	80	70	50	30	10	50	30	10	50	30	10	50	30	10						
室指数	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
	41	50	58	65	71	80	85	90	95	99	32	41	49	56	62	72	78	83	89	94
	26	34	42	49	55	65	72	77	82	86	26	34	41	48	54	63	70	75	80	86
	40	49	56	63	68	77	82	86	91	95	31	40	47	54	60	69	75	80	86	90
	26	34	41	48	54	63	70	75	80	86	37	45	52	58	66	71	76	80	84	87
	30	38	44	51	56	65	70	75	80	84	30	38	44	51	59	66	70	75	80	84
	25	32	39	45	51	59	66	70	76	80	35	42	48	54	65	70	74	78	81	84
	35	42	48	54	59	65	70	74	78	81	28	36	42	48	56	62	66	69	74	78
	24	31	37	43	48	56	62	66	71	75	24	31	37	43	50	55	59	62	66	71
	21	27	32	38	43	50	55	59	64	67	21	27	32	38	43	48	51	54	59	64

A-A'

B-B'

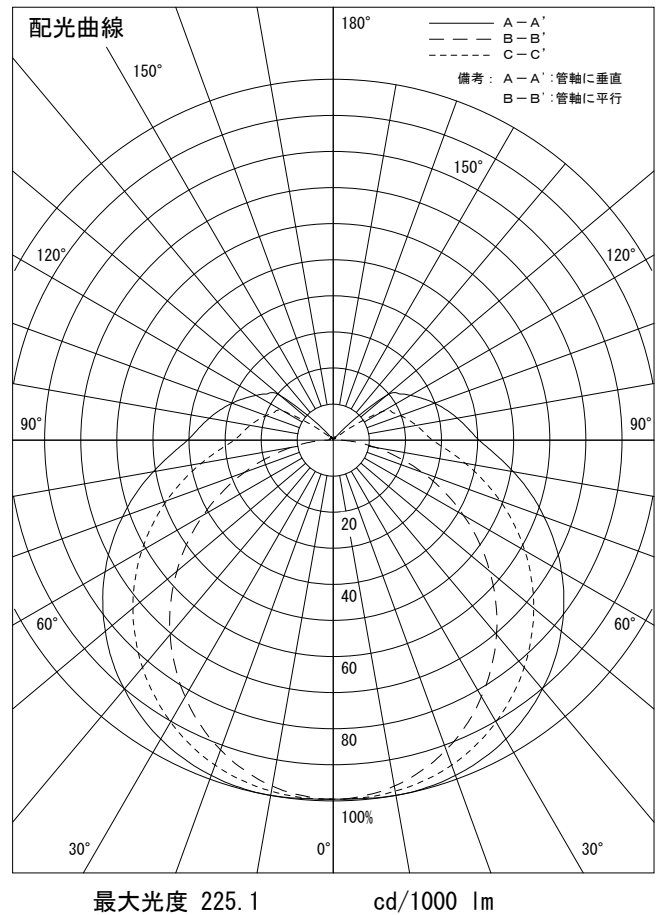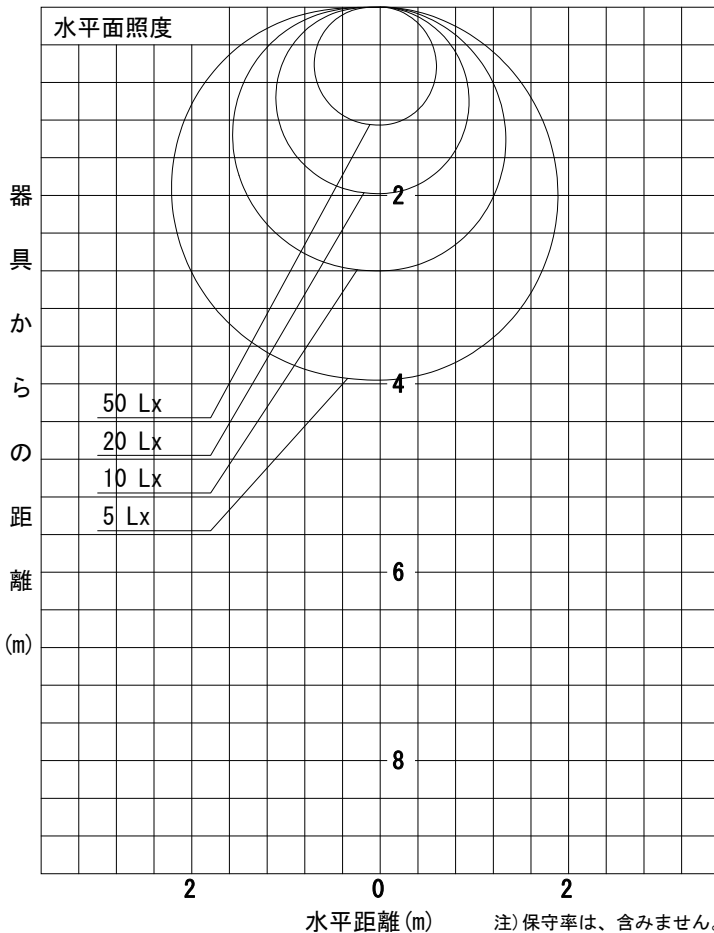

注) 保守率は、含みません。