


姿図

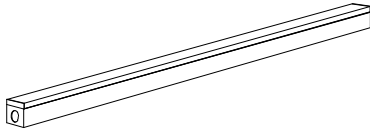

品番	DSY-5521FWG_3500K
光源	LED 32W 3500K-2700K
定格光束	3850.0 lm
1/2照度角	A-A' 64° B-B' 63°
ビーム角	A-A' 112° B-B' 104°

器具効率	100.0 %
上方光束	8.0 %
下方光束	92.0 %
器具間隔 最大限 (取付高さH)	A 1.26 H
	B 1.23 H
保守率	良 0.69
	中 0.67
	否 0.63

反射率 (%)	天井				壁				床				照明率 (×0.01)									
	80	70	50	0	50	30	10	0	50	30	10	0	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
天井	80	70	50	0	50	30	10	0	50	30	10	0	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
壁	50	30	10	0	50	30	10	0	50	30	10	0	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
床	20	20	20	0	20	20	20	0	20	20	20	0	0.6	0.8	1	1.25	1.5	2	2.5	3	4	5
室指数													照明率 (×0.01)									
0.6	45	37	31	44	36	31	42	35	30	40	34	30	27									
0.8	55	46	40	54	45	39	51	44	38	49	42	38	34									
1	63	54	48	61	53	47	58	51	46	55	49	45	41									
1.25	70	62	55	69	61	55	65	58	53	62	56	52	48									
1.5	76	68	62	74	67	61	70	64	59	67	61	57	53									
2	85	77	72	82	76	70	78	72	68	74	69	65	61									
2.5	90	84	78	88	82	77	83	78	74	79	75	71	66									
3	94	89	84	92	86	82	87	82	79	82	79	75	70									
4	99	95	90	97	92	88	91	88	84	86	83	81	75									
5	103	99	95	100	96	93	94	91	88	89	86	84	78									

A-A'

B-B'

