


姿図

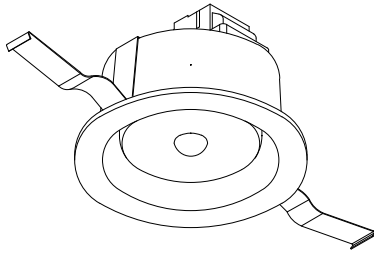

品番	DDL-5577YB
光源	LDF5L-H-GX53/M/V <DAIKO>
ランプ光束	500 lm
1/2照度角	63°
ビーム角	104°

器具効率	87.6 %
上方光束	0.0 %
下方光束	87.6 %
器具間隔 最大限 (取付高さH)	A 1.23 H
	B 1.23 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0		
室指数	照 明 率 (× 0.01)														
0.6	42	35	31	42	35	30	41	35	30	40	34	30	28		
0.8	51	44	39	51	44	39	49	43	38	48	42	38	36		
1	59	51	46	58	51	46	56	50	45	54	49	45	43		
1.25	66	59	53	65	58	53	62	57	52	60	56	52	49		
1.5	71	64	59	70	63	59	67	62	58	65	60	57	54		
2	78	73	68	77	72	67	74	70	66	72	68	65	62		
2.5	83	78	74	82	77	73	79	75	71	76	73	70	67		
3	87	82	78	85	81	77	82	78	75	79	76	74	70		
4	91	87	84	89	86	83	86	83	80	82	80	78	74		
5	94	90	88	92	89	86	88	86	83	85	83	81	77		

