


姿図

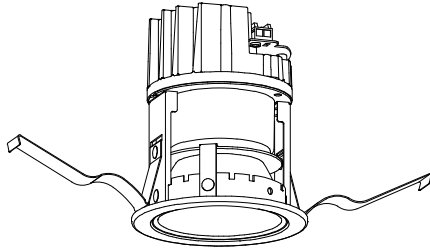

品番	LZD-93500NWW+LZA-93007
光源	LED 26W 4000K
定格光束	2100 lm
1/2照度角	38°
ビーム角	42°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.69 H
	B 0.69 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
床	20			20			20			20			0	
室指数	照 明 率 ( × 0.01 )													
0.6	80	76	72	80	75	72	79	75	72	78	74	72	70	
0.8	86	81	78	86	81	78	84	80	77	83	79	77	75	
1	92	87	84	91	87	83	89	86	83	88	85	82	80	
1.25	96	92	89	95	91	88	93	90	87	91	88	86	84	
1.5	100	96	92	99	95	92	96	93	90	94	91	89	87	
2	105	101	99	103	100	98	101	98	96	98	96	94	91	
2.5	108	105	103	107	104	102	104	102	100	101	99	98	94	
3	111	109	106	109	107	105	106	104	103	103	101	100	96	
4	113	112	110	111	110	108	108	106	105	104	103	103	98	
5	115	114	112	113	112	110	109	108	107	105	105	104	99	

