



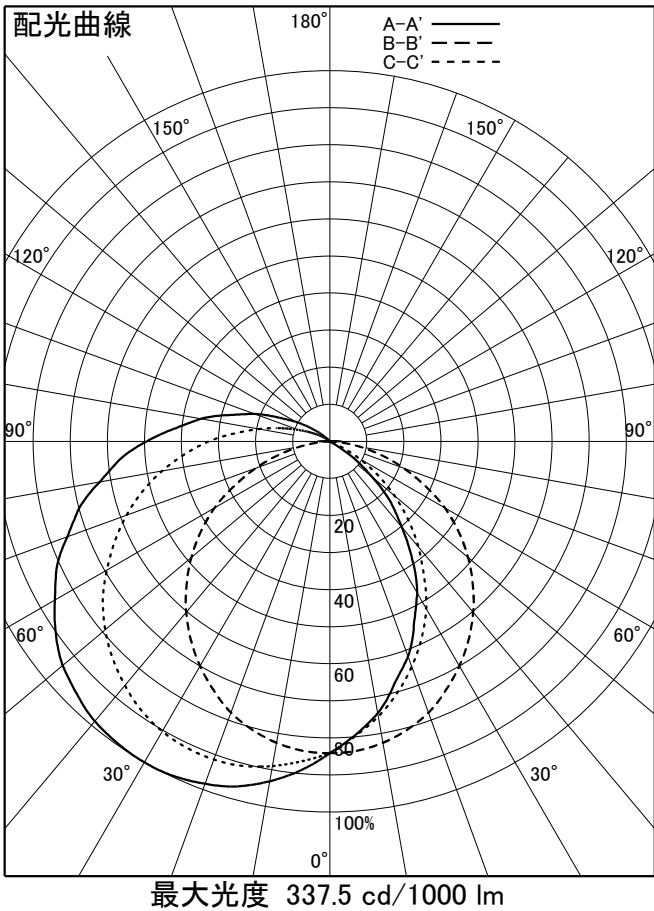

品 番	LZB-92420XW+LZA-92816WE
光 源	LED 18.9W 5000K
定格光束	2980 lm
照度角	(A 41° A' 24°) B-B' 64°
ビーム角	(A 95° A' 33°) B-B' 111°

器具効率	100.0 %
上方光束	8.4 %
下方光束	91.6 %
器具間隔 最大限 (取付高さH)	A *** B 1.24H
保 守 率	良 0.83 中 0.81 否 0.77

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(×0.01)			
0.6	59	55	44	42	35	34	29	29	57	53	43	41	35	34	29	29	53	50	41	40	34	33	28	28	49	47	39	38	32	32	28	27	27	25	
0.8	70	63	54	51	45	43	38	37	67	61	53	50	44	42	37	36	62	57	50	48	42	41	36	36	57	54	47	46	40	39	35	35	34	32	
1	78	70	63	58	53	50	45	44	74	67	61	57	52	49	45	43	68	63	57	54	49	48	43	42	63	60	54	52	47	46	42	41	41	38	
1.25	85	76	71	65	61	57	53	51	81	73	69	64	59	56	52	50	75	69	64	61	57	54	50	49	69	65	60	58	54	52	49	48	47	44	
1.5	91	80	77	70	67	63	60	57	87	77	75	68	66	61	59	56	79	73	70	65	62	59	56	54	73	69	65	62	59	57	54	53	52	49	
2	99	86	87	78	78	71	70	65	94	83	84	76	75	70	69	64	86	79	78	72	71	67	65	62	79	74	73	69	67	65	62	61	60	57	
2.5	104	89	93	82	85	76	78	71	99	87	90	81	82	75	76	70	91	82	83	77	77	72	72	68	83	78	77	74	73	70	68	66	65	62	
3	107	92	98	86	90	81	84	76	103	90	94	84	87	79	81	75	94	85	87	80	82	76	77	72	86	81	81	77	77	73	73	70	69	66	
4	112	95	104	90	98	86	92	82	107	93	100	88	94	84	89	80	98	88	92	85	88	81	83	78	90	84	86	81	82	78	78	75	74	71	
5	115	97	108	93	103	89	97	86	110	95	104	91	99	87	94	84	100	91	96	87	92	84	88	81	92	86	88	84	85	81	82	79	77	74	
7	119	100	114	97	109	94	105	91	114	98	109	95	105	92	101	90	104	93	100	91	97	89	94	87	95	89	93	87	90	85	88	84	82	79	
10	122	102	118	100	115	98	112	95	116	100	113	98	110	96	107	94	106	96	104	94	101	92	99	90	97	91	96	90	94	89	92	87	86	82	

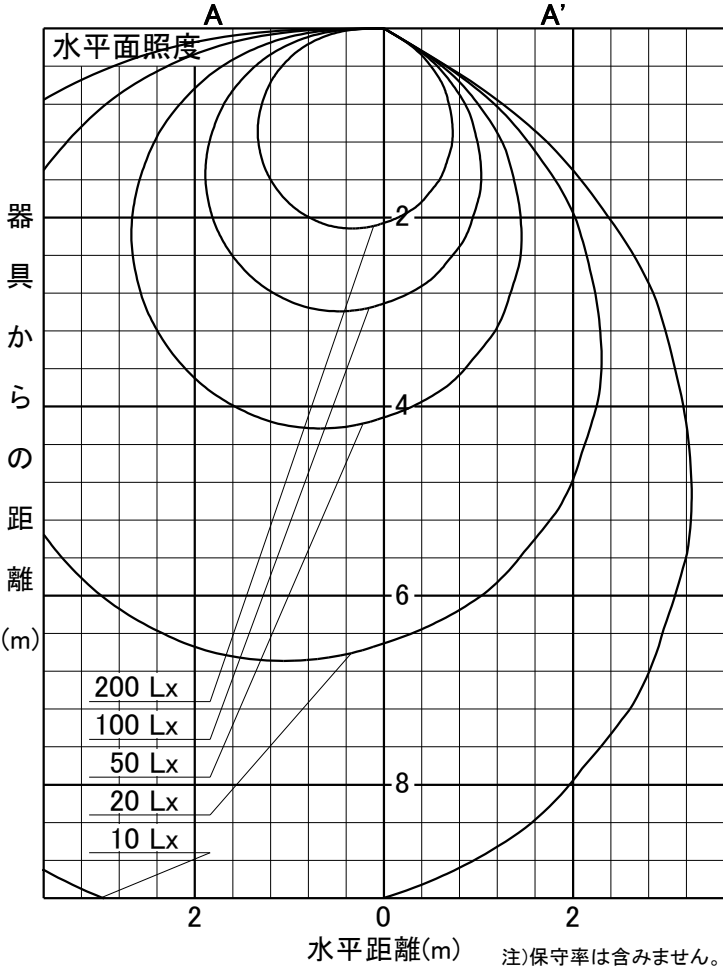

注)保守率は含みません。