



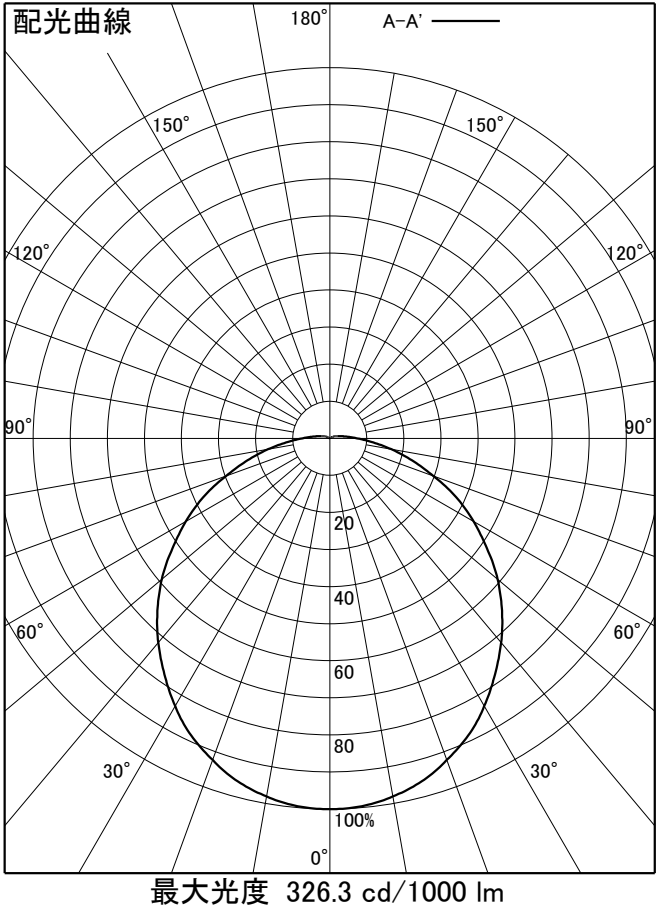

品 番	LZB-92584XW+LZA-92816WE
光 源	LED 18.9W 5000K
定格光束	3200 lm
照度角	64°
ビーム角	113°

器具効率	100.0 %
上方光束	3.1 %
下方光束	97.0 %
器具間隔 最大限 (取付高さH)	A 1.24H
保 守 率	良 0.83 中 0.81 否 0.77

反 射 率 (%)	天井	80								70								50								30								20	0
	壁 床	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照 明 率																														(× 0.01)			
室指数																																			
0.6	61	57	47	44	38	37	32	31	59	55	46	44	37	36	31	31	56	52	44	42	36	36	31	31	53	50	42	41	36	35	31	30	30	28	
0.8	72	65	57	54	47	45	41	40	70	64	56	53	47	45	40	39	65	61	53	51	45	44	40	39	61	58	51	49	44	43	39	38	38	36	
1	80	72	66	61	56	53	49	47	77	70	64	60	55	52	48	47	72	67	61	58	53	51	47	46	68	64	58	56	51	50	46	45	45	43	
1.25	88	78	74	68	64	60	57	54	85	76	72	67	63	60	56	54	79	73	69	65	61	58	55	53	74	69	65	62	59	57	53	52	52	50	
1.5	93	82	81	73	71	66	64	60	90	80	78	72	70	65	63	60	84	77	74	70	67	64	61	59	78	73	70	67	64	62	59	58	57	55	
2	102	88	90	81	82	74	75	69	98	86	88	79	80	73	73	69	91	83	83	77	76	72	71	67	84	79	78	74	73	70	68	66	66	63	
2.5	107	92	97	86	89	80	82	75	103	90	94	84	87	79	81	75	95	87	88	82	82	77	77	73	89	83	83	79	78	75	74	72	71	69	
3	110	95	102	89	94	84	88	80	106	93	98	88	92	83	86	79	98	89	92	85	87	81	82	78	92	86	87	82	83	79	79	76	75	73	
4	115	98	108	93	102	89	96	86	110	96	104	92	99	88	94	85	102	93	97	89	93	86	89	83	95	89	91	86	88	84	85	81	80	78	
5	118	100	112	96	106	93	102	89	113	98	108	95	103	91	99	88	105	95	101	92	97	89	93	87	97	91	94	89	91	87	89	85	84	81	
7	122	102	117	100	113	97	109	95	117	101	113	98	109	96	106	94	108	97	105	95	102	93	100	92	101	94	98	93	96	91	94	89	88	86	
10	124	104	121	102	118	100	115	99	119	103	117	101	114	99	111	98	111	99	108	98	106	97	104	95	103	96	101	95	100	94	98	93	92	89	

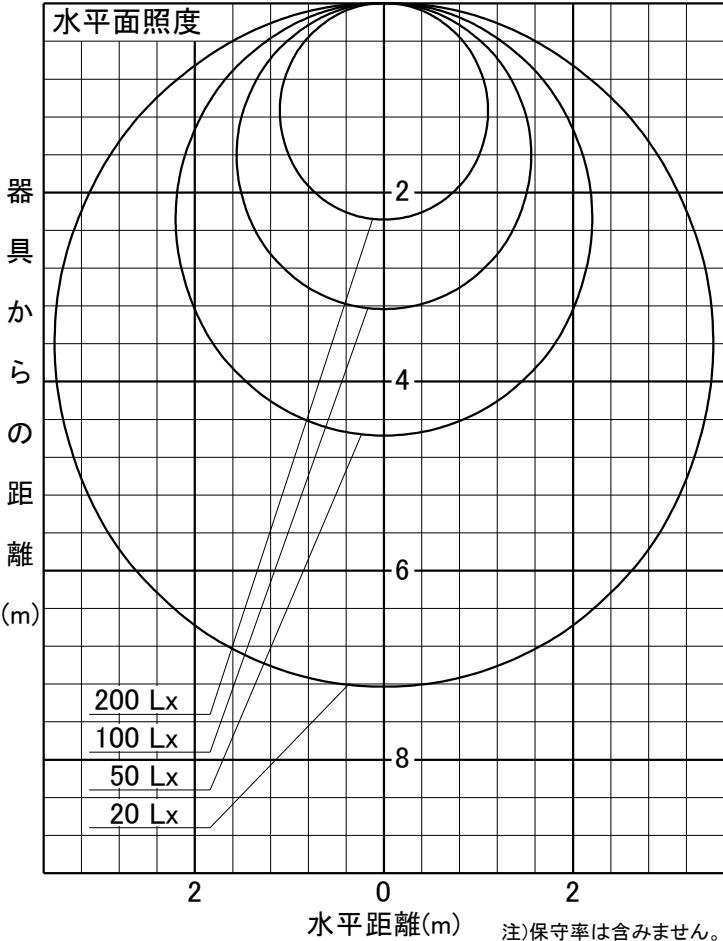

注)保守率は含みません。