

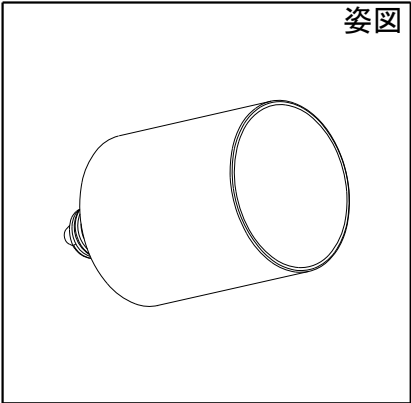


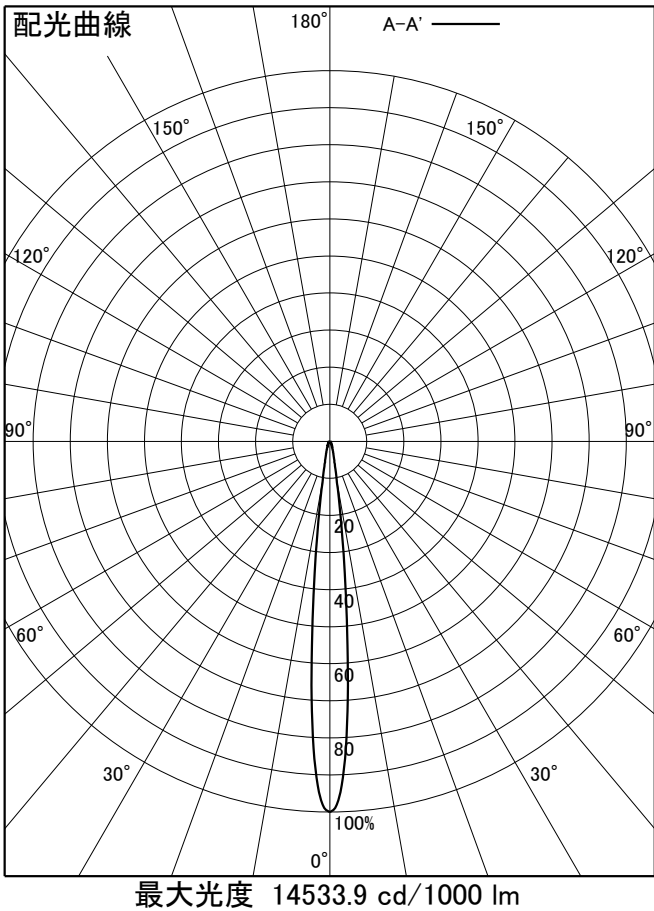

品 番	LZA-93790LSN
光 源	LDR4L-N-E11/D/S11V
ランプ光束	275 lm
照度角	11°
ビーム角	11°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.19H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	90	83	80	76	74	72	70	68	89	82	79	76	73	71	69	68	86	81	78	75	73	71	69	68	84	79	77	74	72	71	69	68	68	67	
0.8	97	88	87	82	81	77	76	74	95	87	86	81	80	77	76	74	92	86	84	80	79	77	75	74	89	84	83	80	78	76	74	74	73	72	
1	104	93	94	87	88	83	83	80	101	92	93	87	87	83	82	80	97	90	90	86	85	82	81	79	94	88	88	84	84	81	80	79	79	78	
1.25	109	97	100	92	94	88	89	85	106	96	98	91	92	87	88	84	102	94	95	90	90	86	86	84	97	92	92	88	88	86	85	83	83	82	
1.5	113	99	104	95	98	91	94	88	110	98	102	94	97	91	93	88	105	96	99	93	94	90	91	87	100	94	95	91	92	89	89	87	86	85	
2	118	103	111	99	106	97	102	94	115	102	109	99	104	96	100	94	109	100	104	97	101	95	97	93	104	98	100	96	97	94	95	92	92	90	
2.5	122	105	116	102	111	100	107	98	118	104	113	102	109	99	106	98	112	102	108	100	105	98	102	97	106	100	104	98	101	97	99	96	95	94	
3	124	107	119	105	115	103	112	101	121	106	116	104	113	102	110	101	114	104	111	102	108	101	106	99	108	102	106	100	104	99	102	98	98	96	
4	127	108	123	107	120	105	117	104	123	107	120	106	117	105	114	103	116	105	114	104	111	103	109	102	110	103	108	102	106	101	105	101	100	98	
5	129	109	126	108	123	107	121	106	125	108	122	107	120	106	118	105	117	106	115	105	114	104	112	104	111	104	109	103	108	103	107	102	101	100	
7	131	110	129	110	128	110	126	109	127	109	125	109	124	109	122	108	119	107	118	107	117	107	116	106	112	105	112	105	111	105	110	105	104	102	
10	133	111	132	111	130	111	129	111	128	110	127	110	126	110	125	110	120	108	119	108	119	108	118	108	113	106	113	106	112	106	112	106	105	103	

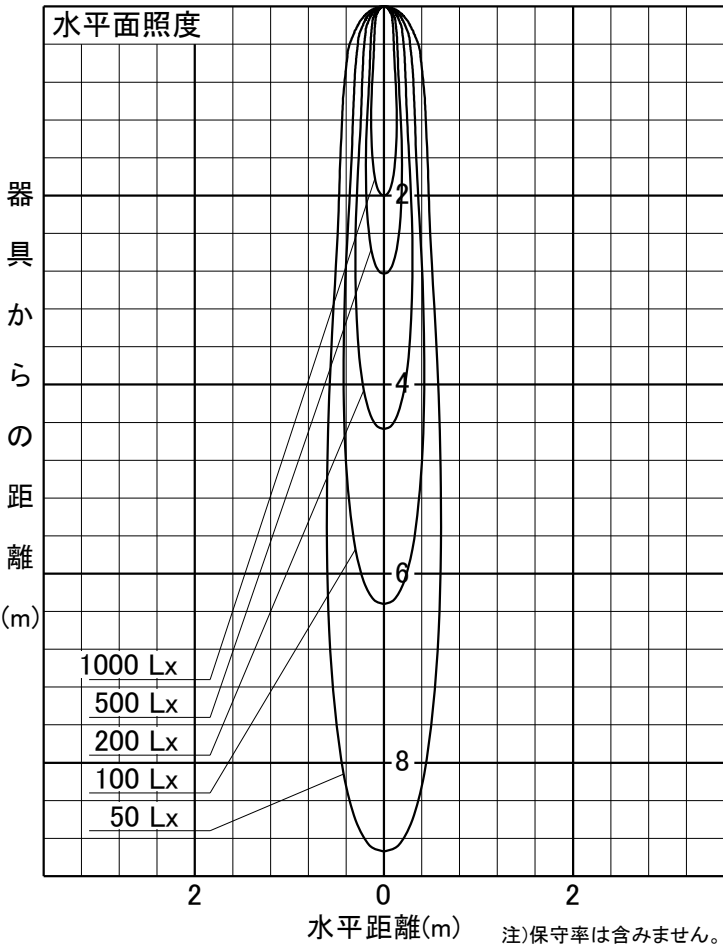

注)保守率は含みません。