

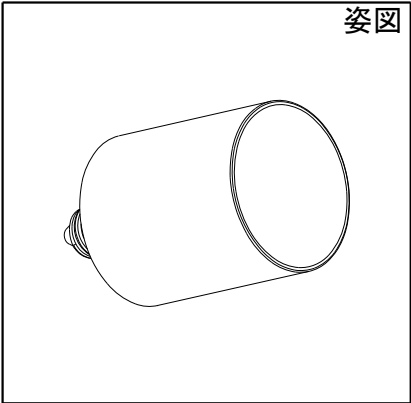


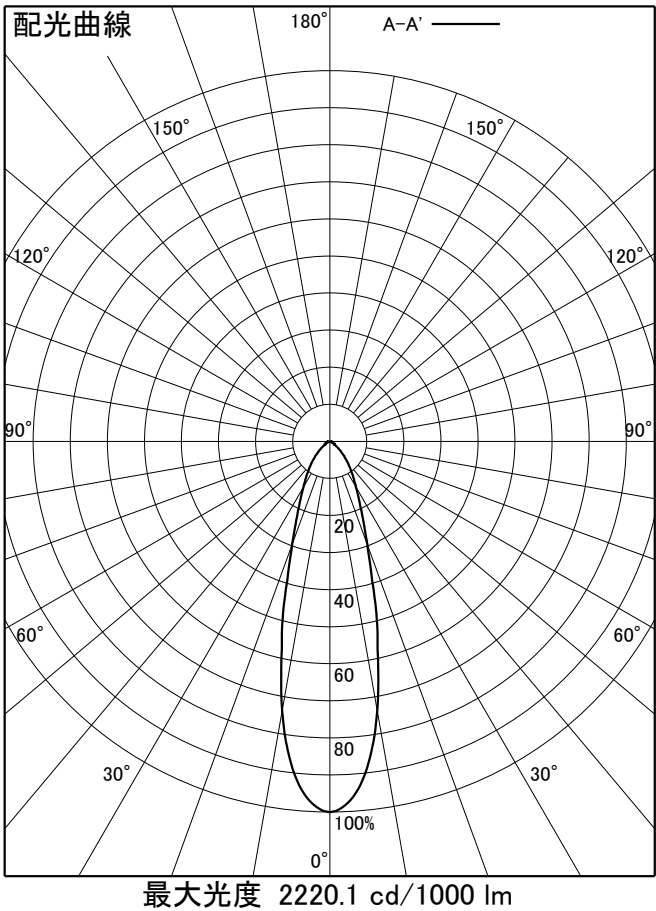

品 番	LZA-93790LSW
光 源	LDR4L-W-E11/D/S11V
ランプ光束	450 lm
照度角	27°
ビーム角	30°

器具効率	100.0 %
上方光束	0.3 %
下方光束	99.7 %
器具間隔 最大限 (取付高さH)	A 0.49H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数		照 明 率																														(× 0.01)			
0.6	85	79	75	71	69	67	64	63	84	78	74	71	68	66	64	63	81	76	73	70	67	66	64	63	79	75	72	69	67	66	63	63	63	62	
0.8	93	85	83	78	76	73	71	70	92	84	82	77	76	73	71	70	88	82	80	76	74	72	70	69	85	80	78	75	73	72	70	69	69	68	
1	100	90	90	84	83	79	79	76	98	89	89	83	83	79	78	76	94	87	86	82	81	78	77	75	90	85	84	81	79	77	76	75	75	73	
1.25	106	94	96	88	90	84	85	81	103	93	95	88	89	84	84	81	98	91	92	86	87	83	83	80	94	89	89	85	85	82	81	80	79	78	
1.5	110	96	101	92	95	88	90	85	107	95	99	91	93	87	89	85	101	93	95	89	91	86	87	84	97	91	92	88	88	85	85	83	83	82	
2	115	100	108	97	103	94	98	91	112	99	106	96	101	93	97	91	106	97	101	94	97	92	94	90	101	95	97	93	94	91	91	89	88	87	
2.5	119	103	113	100	108	97	104	95	115	101	110	99	106	97	102	95	109	99	105	97	102	95	99	94	104	97	101	96	98	94	96	92	92	90	
3	122	104	116	102	112	100	109	98	118	103	113	101	110	99	106	98	111	101	108	99	105	98	102	96	105	99	103	98	101	96	99	95	95	93	
4	124	106	120	104	117	103	114	101	120	105	117	103	114	102	111	100	113	103	111	101	108	100	106	99	107	101	105	99	103	99	102	98	97	95	
5	126	107	123	105	120	104	117	103	122	106	119	104	117	103	114	102	114	103	112	102	110	102	109	101	108	101	106	101	105	100	104	99	98	97	
7	129	108	126	107	124	107	123	106	124	107	122	106	121	106	119	105	116	105	115	104	114	104	113	104	110	103	109	103	108	102	107	102	101	99	
10	130	109	129	109	127	108	126	108	126	108	124	107	123	107	122	107	117	106	117	105	116	105	115	105	110	104	110	103	109	103	109	103	102	100	

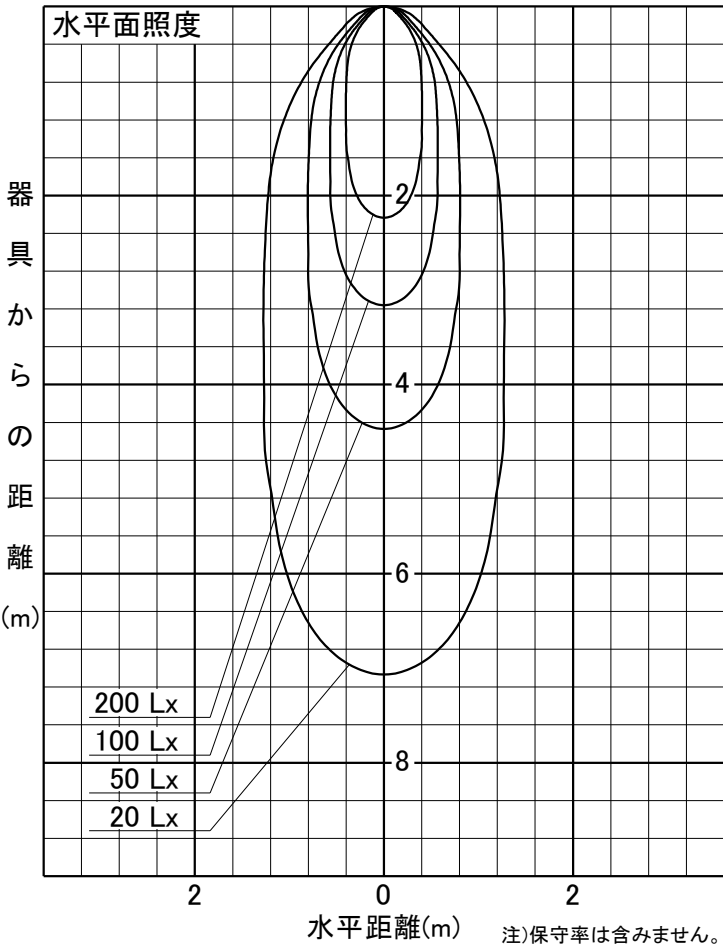

注)保守率は含みません。