

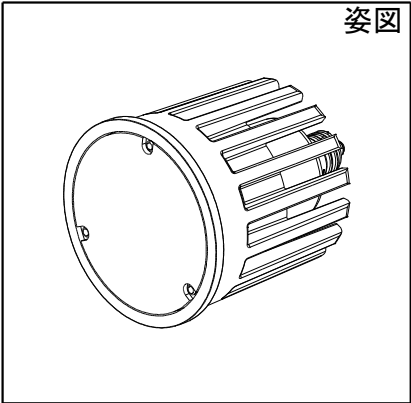


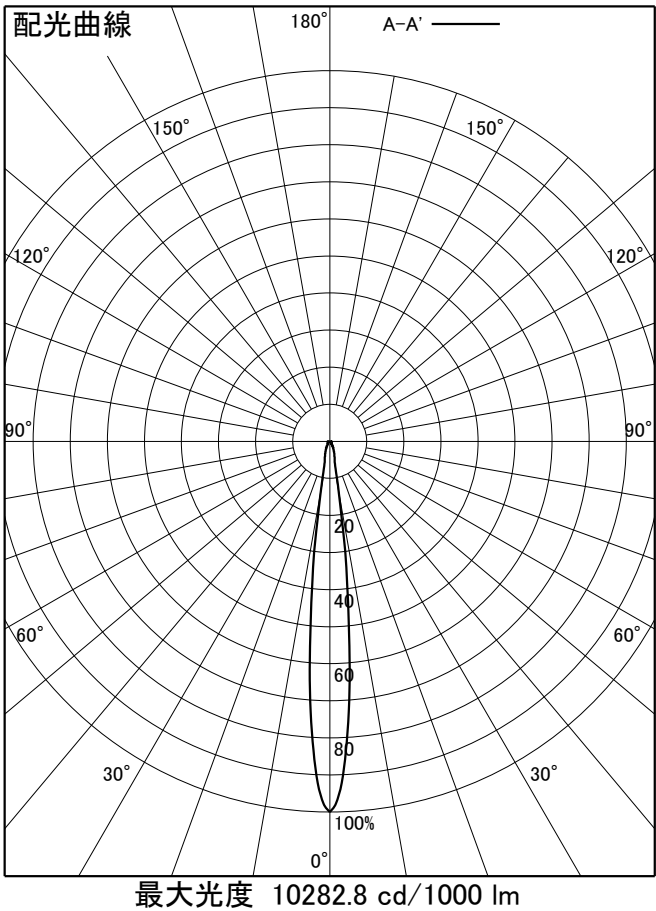

品 番	LZA-93795LSN
光 源	LDR8L-N-E11/D/27/5/12
ランプ光束	660 lm
照度角	12°
ビーム角	12°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.21H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井 壁 床	80								70								50								30								20	0
		70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	84	77	73	69	66	64	61	61	82	76	72	69	66	64	61	60	80	75	71	68	65	64	61	60	77	73	69	67	64	63	61	60	60	59	
0.8	91	83	80	75	73	70	68	66	89	82	79	75	72	70	67	66	86	80	77	74	71	69	67	66	83	78	75	73	70	69	66	65	65	64	
1	98	88	87	81	80	76	74	72	95	87	86	80	79	75	74	72	91	84	83	79	77	74	73	71	87	83	81	78	76	74	72	71	71	69	
1.25	103	92	93	85	86	81	80	77	101	91	91	85	85	80	80	76	96	88	88	83	83	79	78	76	91	86	85	82	81	78	77	75	75	74	
1.5	107	95	98	89	91	84	86	81	104	93	96	88	90	84	85	80	99	91	92	86	87	83	83	80	94	89	89	85	85	82	81	79	79	77	
2	114	99	106	94	99	90	94	87	110	98	103	93	97	90	93	87	104	95	99	92	94	89	90	86	99	93	95	90	91	87	88	85	85	83	
2.5	118	102	111	98	105	95	101	92	114	100	108	97	103	94	99	92	108	98	103	95	99	93	96	90	102	96	98	93	95	91	93	89	89	87	
3	121	104	115	100	110	98	106	96	117	102	112	100	107	97	104	95	110	100	106	98	103	96	100	94	104	98	101	96	99	94	96	93	92	90	
4	124	106	119	103	115	101	112	100	120	104	116	102	112	100	109	99	113	102	110	100	107	99	105	97	106	100	104	99	102	97	100	96	95	94	
5	126	107	122	105	119	104	116	102	122	106	119	104	116	103	113	101	114	103	112	102	110	101	108	100	108	101	106	100	104	99	103	98	98	96	
7	129	109	127	108	124	107	122	106	125	107	123	107	121	106	119	105	117	105	115	105	114	104	113	103	110	103	109	103	108	102	107	102	101	99	
10	131	110	129	109	128	109	127	108	126	108	125	108	124	108	123	107	118	106	117	106	116	106	116	105	111	104	111	104	110	104	109	104	103	101	

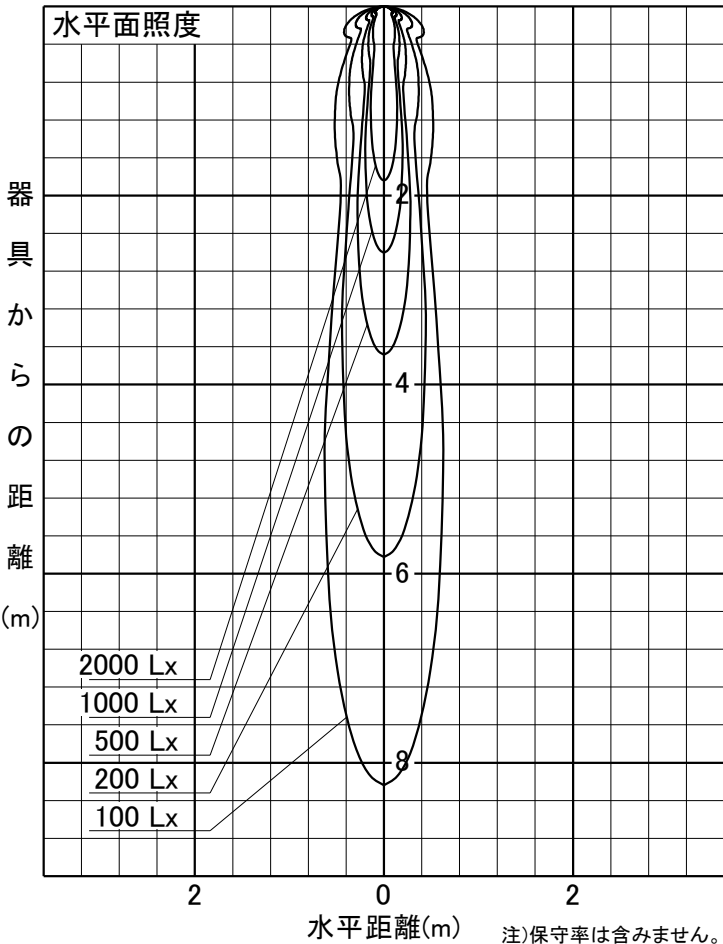

注)保守率は含みません。