

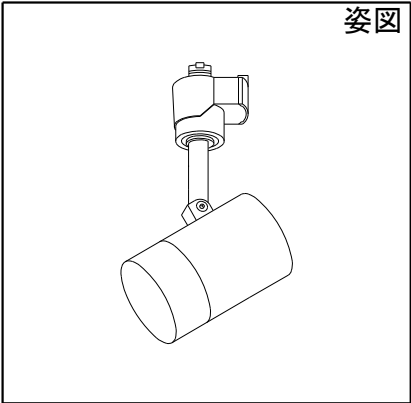


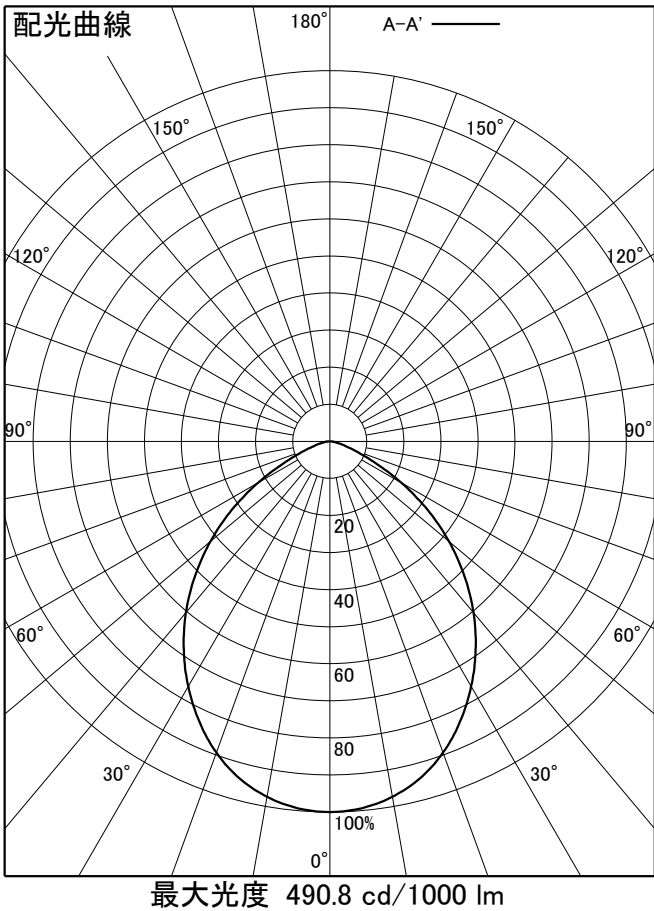

品 番	DSL-5326YWGE
光 源	LED 8.5W 2700K
定格光束	560 lm
1/2照度角	60°
1/2ビーム角	91°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.15H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	69	64	56	53	48	46	42	42	68	63	55	53	48	46	42	42	65	61	54	52	47	46	42	42	62	59	53	51	46	45	42	41	41	40	
0.8	80	73	67	63	59	56	53	51	78	72	66	62	58	56	52	51	74	69	64	61	57	55	52	51	71	67	62	60	56	55	51	51	51	49	
1	89	80	76	71	68	64	62	59	86	78	75	70	67	64	61	59	82	76	72	69	65	63	60	59	78	74	70	67	64	62	59	59	58	57	
1.25	96	86	85	78	76	72	70	67	93	84	83	77	75	71	70	67	88	82	80	75	73	70	68	66	84	79	77	74	72	69	67	66	66	64	
1.5	102	89	91	82	83	77	77	73	99	88	89	82	82	76	76	72	93	85	85	80	79	75	74	72	88	83	82	78	77	74	73	71	71	69	
2	109	95	100	89	93	85	87	81	106	93	98	88	91	84	86	81	99	91	93	87	88	83	84	80	94	88	89	85	85	82	81	79	79	77	
2.5	113	98	106	93	100	90	94	86	110	97	103	92	97	89	93	86	103	94	98	91	93	87	90	85	98	92	93	89	90	86	87	84	83	82	
3	117	100	110	96	104	93	100	90	113	99	107	95	102	92	98	90	106	96	101	93	97	91	94	88	100	94	96	91	93	89	91	87	87	85	
4	120	102	115	99	110	97	106	94	116	101	111	98	107	96	104	94	109	99	105	96	102	94	99	92	102	96	100	94	97	93	95	91	90	89	
5	122	104	118	101	114	99	110	97	118	102	114	100	111	98	107	96	111	100	107	98	105	96	102	95	104	98	102	96	100	95	98	93	93	91	
7	125	105	122	104	119	102	116	101	121	104	118	103	116	101	113	100	113	102	111	101	109	99	107	98	106	100	105	99	103	98	102	97	96	94	
10	127	107	125	106	123	104	121	104	123	105	121	104	119	103	117	103	115	103	113	102	112	102	110	101	108	101	106	100	105	100	104	99	98	96	

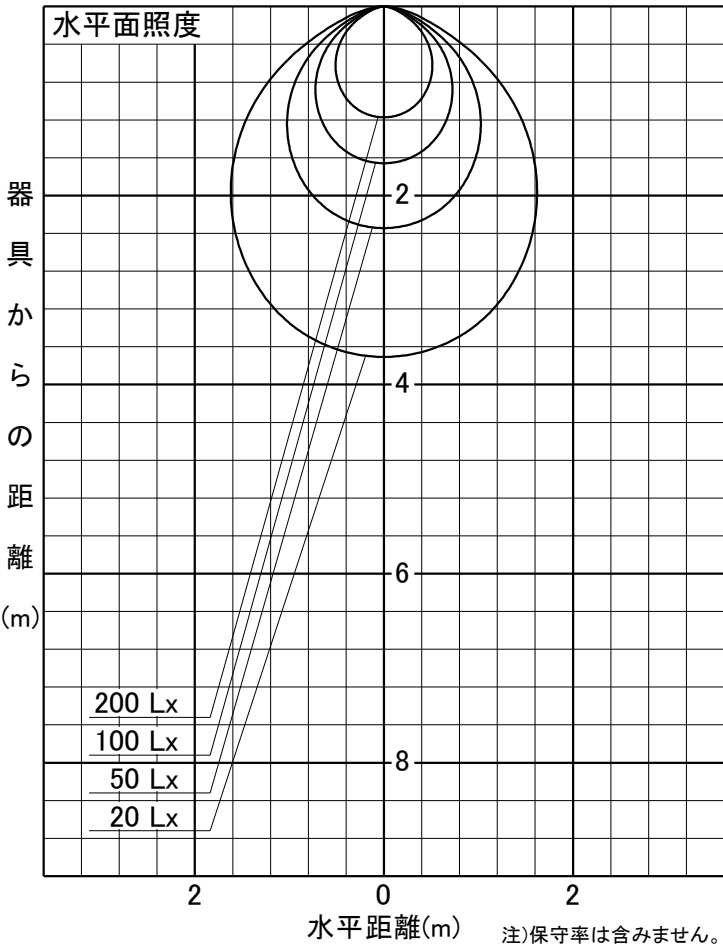

注)保守率は含みません。