

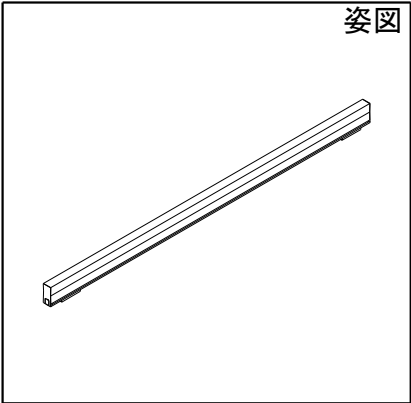


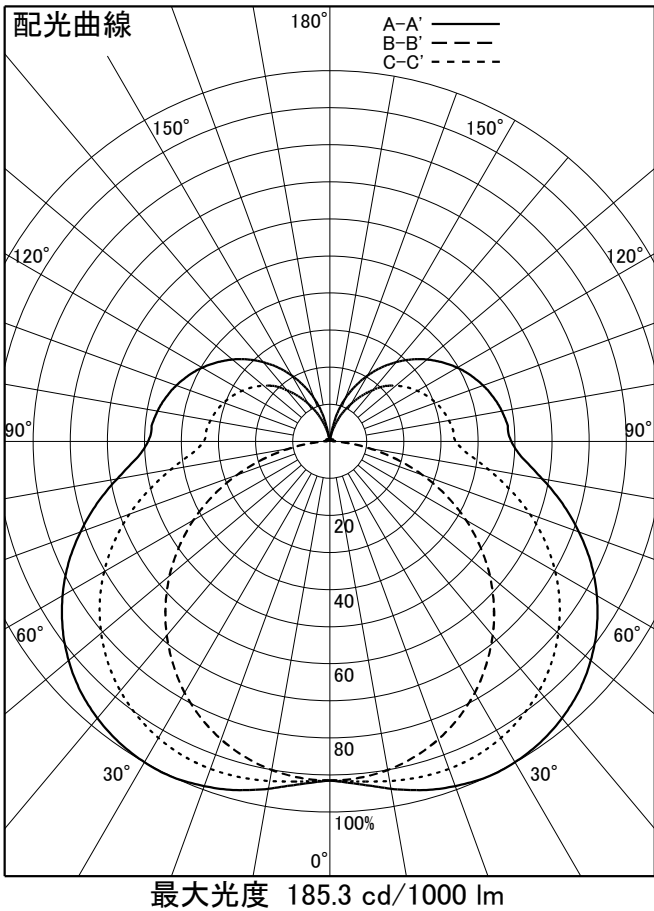

品 番	DBL-5594LWGE
光 源	LED 16W 2700K
定格光束	2260 lm
照度角	A-A' 78° B-B' 65°
ビーム角	A-A' 210° B-B' 115°

器具効率	100.0 %
上方光束	24.8 %
下方光束	75.2 %
器具間隔 最大限 (取付高さH)	A 1.63H B 1.27H
保 守 率	良 0.69 中 0.67 否 0.63

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	55	50	40	38	31	30	24	24	51	48	38	36	29	29	24	23	46	43	34	33	27	27	22	22	40	38	31	30	25	25	21	20	20	17	
0.8	65	59	49	46	39	38	33	32	61	56	47	44	38	37	31	31	54	50	42	40	35	34	29	29	47	45	38	37	32	31	27	27	26	22	
1	72	65	57	53	47	45	40	39	68	62	55	51	45	43	38	37	60	55	49	46	41	40	36	35	53	50	44	42	38	37	33	32	31	27	
1.25	80	71	65	60	55	52	48	45	75	67	62	57	53	50	46	44	66	60	56	52	48	46	42	41	58	54	50	48	44	42	39	38	37	32	
1.5	85	75	72	65	62	57	54	51	80	71	68	62	59	55	52	49	70	64	61	57	53	51	48	46	61	58	54	52	48	47	44	43	41	36	
2	93	81	81	72	72	65	64	60	87	77	77	69	68	63	62	58	76	70	68	63	62	58	56	54	67	63	61	58	56	54	51	50	48	43	
2.5	98	85	88	77	79	71	72	66	92	81	83	74	75	68	69	63	81	73	74	68	68	63	62	59	71	66	65	62	61	58	57	55	53	47	
3	102	88	93	81	85	75	78	70	96	84	87	78	80	72	74	68	84	76	77	71	72	67	67	63	73	69	69	65	64	62	61	59	56	51	
4	107	91	99	86	92	81	86	77	100	87	93	82	87	78	82	74	88	79	82	75	78	72	74	69	77	72	73	69	69	66	66	64	61	55	
5	110	93	103	89	97	84	92	81	103	89	97	85	92	81	87	78	90	82	86	78	82	75	78	72	79	74	76	72	73	69	70	67	64	58	
7	114	96	109	93	104	89	100	86	107	92	102	89	98	86	94	83	94	84	90	82	87	80	84	77	82	77	80	75	77	73	75	72	69	63	
10	117	98	113	96	110	93	106	91	110	94	106	92	103	90	100	88	96	87	94	85	91	83	89	81	85	79	83	78	81	77	79	75	72	66	

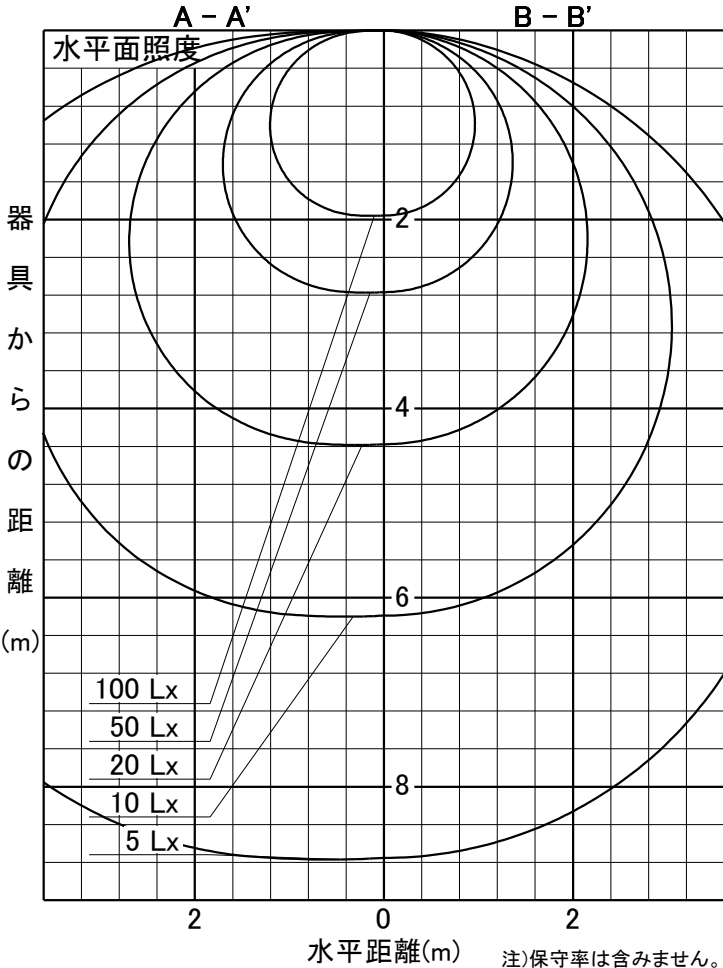

注)保守率は含みません。