

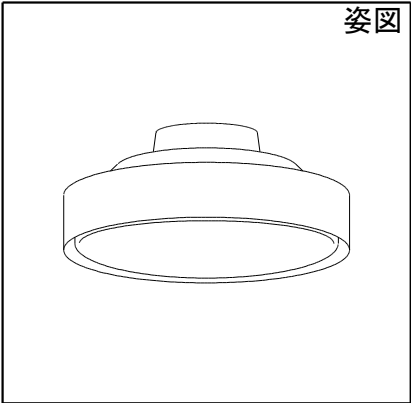


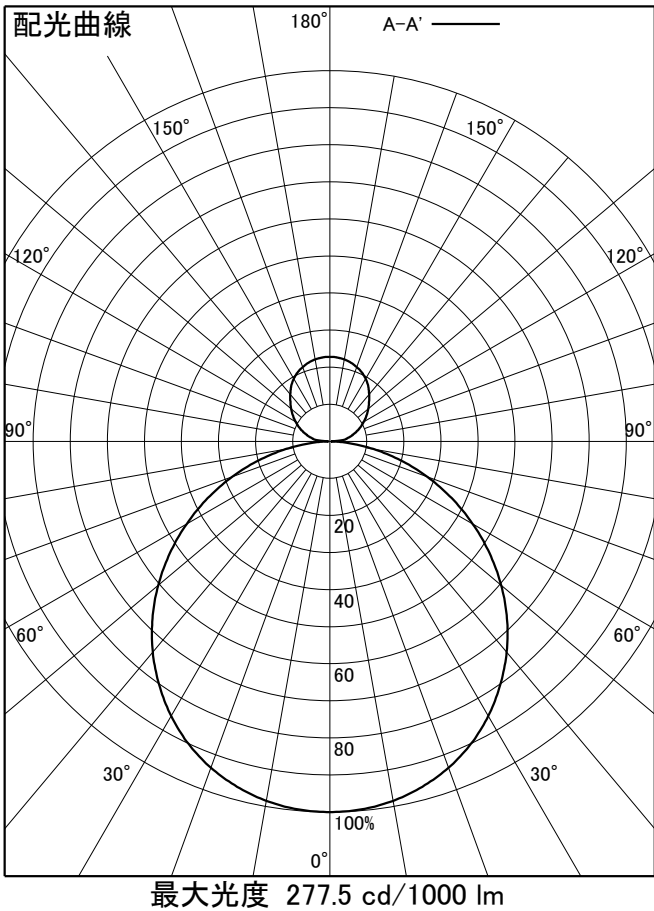

品 番	DCL-42381E_4700K
光 源	LED 35W 6500K~2700K
定格光束	4000 lm
照度角	65°
ビーム角	113°

器具効率	100.0 %
上方光束	19.6 %
下方光束	80.4 %
器具間隔 最大限 (取付高さH)	A 1.27H
保 守 率	良 0.67 中 0.63 否 0.56

反 射 率 (%)	天井	80								70								50								30								20	0
	壁	70		50		30		10		70		50		30		10		70		50		30		10		70		50		30		10		10	0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率																														(× 0.01)			
0.6	60	55	45	43	37	36	31	31	57	53	44	42	36	35	30	30	52	49	41	39	34	33	29	29	47	45	38	37	32	32	28	28	27	24	
0.8	70	64	56	53	47	45	40	39	67	61	54	51	45	44	39	38	60	56	50	48	43	41	37	37	55	52	46	44	40	39	35	35	34	31	
1	78	70	64	60	55	52	48	47	74	67	62	58	53	51	47	46	67	62	57	54	50	48	45	44	61	57	53	51	47	46	42	42	41	37	
1.25	86	76	73	67	64	60	57	54	81	73	70	65	61	58	55	53	73	67	64	60	57	55	52	50	66	62	59	56	53	52	49	48	47	43	
1.5	91	81	79	72	70	65	63	60	87	77	76	70	68	63	61	58	78	71	69	65	63	60	58	56	70	66	64	61	58	56	54	53	52	48	
2	99	86	89	79	81	73	74	69	94	83	85	77	77	71	72	67	84	77	77	72	71	67	67	64	76	71	70	67	66	64	62	60	59	55	
2.5	104	90	95	84	88	79	82	75	99	87	91	81	84	77	79	73	88	80	82	76	77	72	73	69	80	75	75	71	71	68	68	65	64	59	
3	108	92	100	87	93	83	87	79	102	89	95	85	89	81	84	77	91	83	86	79	82	76	78	73	82	77	78	74	75	71	72	69	67	63	
4	112	95	106	91	100	88	95	85	106	92	100	89	95	85	91	82	95	86	91	83	87	80	84	78	85	80	82	78	79	76	77	74	71	67	
5	115	97	109	94	105	91	100	88	109	94	104	91	100	88	96	86	97	88	94	85	90	83	88	81	87	82	85	80	82	78	80	76	74	69	
7	119	100	114	97	111	95	108	93	112	96	108	94	105	92	102	91	100	90	98	88	95	87	93	85	90	84	88	83	86	82	85	81	78	73	
10	121	101	118	100	116	98	113	97	114	98	112	97	110	95	107	94	102	92	100	91	99	90	97	89	92	86	90	85	89	84	88	83	81	76	

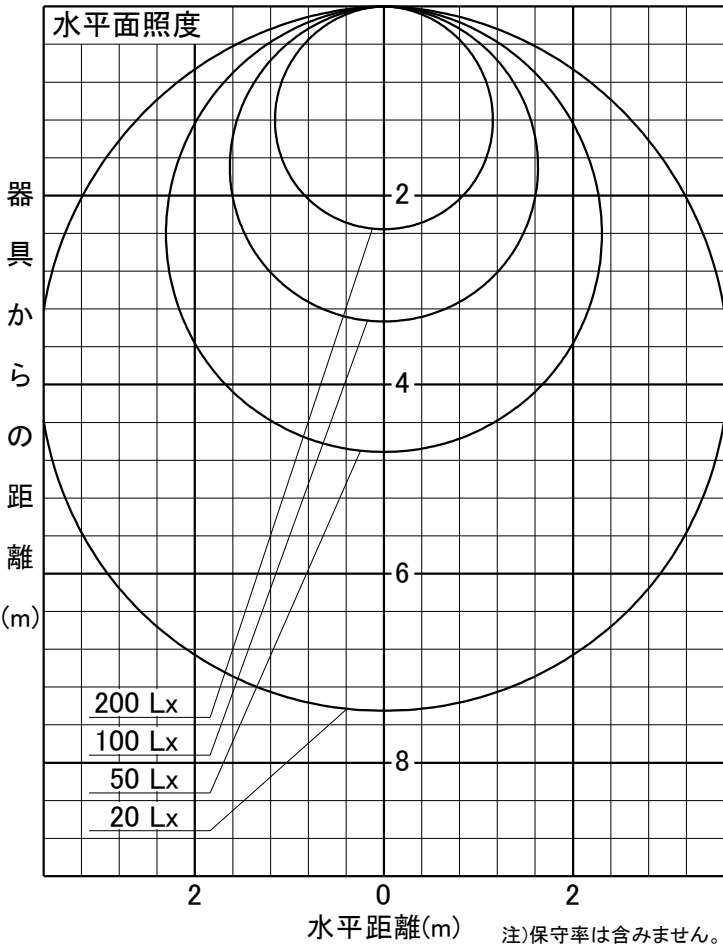

注)保守率は含みません。