


姿図

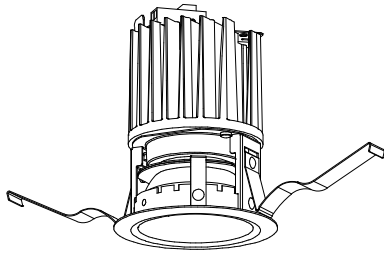

品 番	LZD-92903LWV
光 源	LED 15W Q+2700K
定格光束	860.0 lm
1/2照度角	38 °
ビーム角	40 °

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.68 H B 0.68 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		81	76	73	80	76	73	79	76	73	79	75	72	71
0.8		87	82	78	86	81	78	85	81	78	83	80	77	76
1		92	87	84	91	87	84	89	86	83	88	85	82	80
1.25		96	92	89	95	91	88	93	90	87	91	89	86	84
1.5		100	96	92	98	95	92	96	93	90	94	91	89	87
2		105	101	98	103	100	98	100	98	96	98	96	94	91
2.5		108	105	103	107	104	102	103	101	100	101	99	97	94
3		111	108	106	109	107	105	106	104	102	102	101	100	96
4		113	111	110	111	110	108	108	106	105	104	103	102	98
5		115	113	112	113	111	110	109	108	107	105	104	104	99

