


姿図

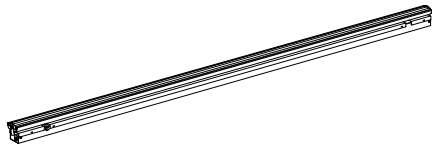



品番	LZY-92858AT
光源	LED 19W 3500K
定格光束	2360 lm
1/2照度角	A-A' 16° B-B' 59°
ビーム角	A-A' 16° B-B' 80°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.29 H
	B 1.13 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井	80			70			50			30			0
		壁	50	30	10	50	30	10	50	30	10	50	30	10
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6		58	51	46	57	51	46	56	50	46	55	49	45	44
0.8		67	60	54	66	59	54	65	58	54	63	58	53	51
1		75	67	62	74	67	62	72	66	61	70	65	60	58
1.25		81	74	69	80	74	69	78	72	68	76	71	67	64
1.5		86	80	75	85	79	74	82	77	73	80	76	72	69
2		94	88	83	92	87	83	89	85	81	86	83	80	76
2.5		99	94	89	97	92	88	93	90	86	90	87	84	81
3		102	98	94	100	96	93	97	93	90	93	91	88	84
4		106	102	99	104	101	98	100	97	95	96	94	92	88
5		108	105	103	106	103	101	102	100	98	98	96	95	90

A-A'

B-B'

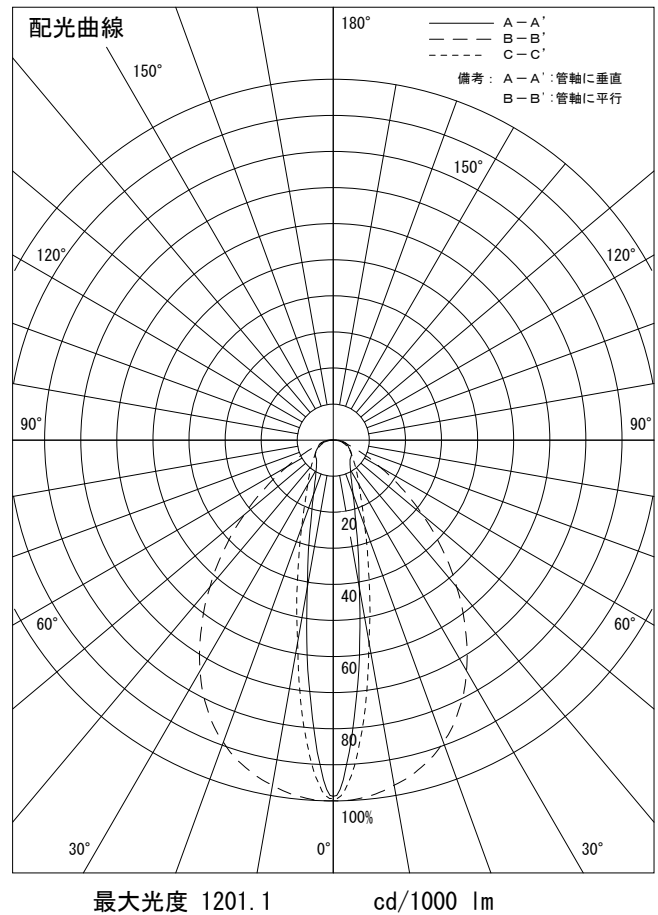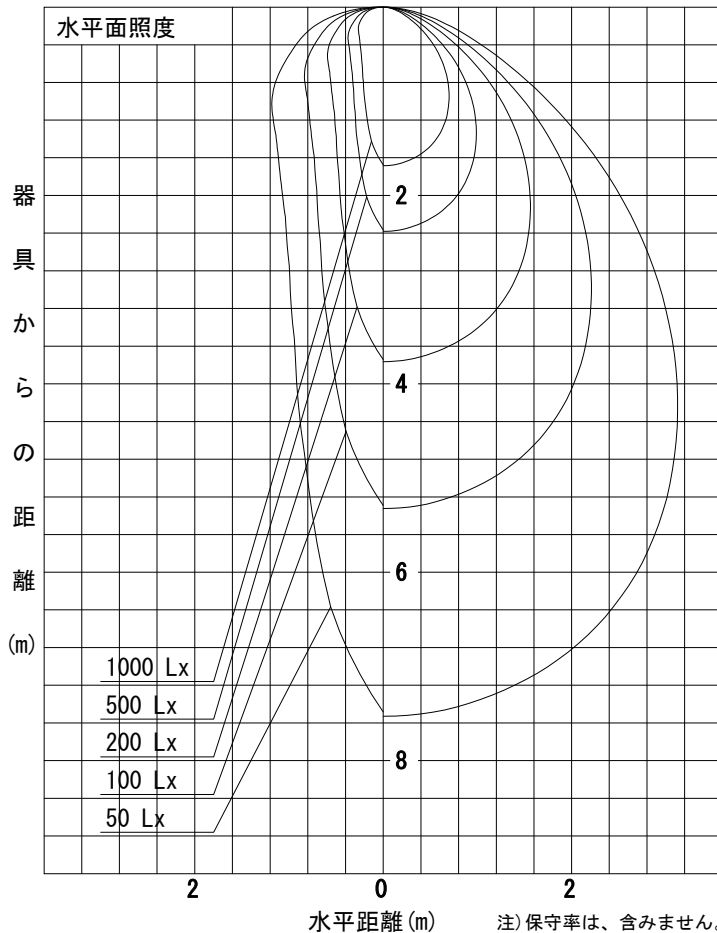

注) 保守率は、含みません。