


姿図

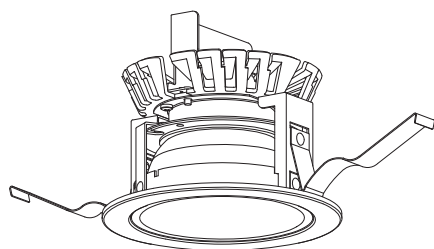

品 番

LZD-92286YW

光 源

LED 24W 3000K

定格光束

1960.0 lm

1/2照度角

57°

ビーム角

68°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 1.09 H B 1.09 H
保 守 率	良 0.67 中 0.63 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (× 0.01)												
0.6	79	75	71	79	74	71	78	74	71	77	73	71	69	
0.8	86	81	77	85	80	77	84	80	77	82	79	76	74	
1	91	87	83	91	86	83	89	85	82	87	84	82	80	
1.25	96	92	88	95	91	88	93	90	87	91	88	86	84	
1.5	100	95	92	98	95	92	96	93	90	94	91	89	86	
2	105	101	99	103	100	98	101	98	96	98	96	94	91	
2.5	108	105	103	107	104	102	103	101	100	101	99	98	94	
3	111	108	106	109	107	105	106	104	102	102	101	100	96	
4	113	111	110	111	109	108	107	106	105	104	103	102	98	
5	115	113	112	112	111	110	109	108	107	105	104	104	99	

