


姿図

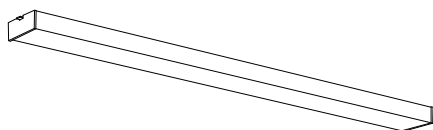

品 番	DCL-38485A
光 源	LED 24W 3500K
定格光束	1770.0 lm
1/2照度角	63 °
ビーム角	106 °

器具効率	100.0 %
上方光束	3.6 %
下方光束	96.4 %
器具間隔 最大限 (取付高さH)	A 1.22 H B 1.22 H
保 守 率	良 0.63 中 0.60 否 0.56

反射率 (%)	天井	80			70			50			30			0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	0
	床	20			20			20			20			0
室指数		照 明 率 (×0.01)												
0.6		47	38	33	46	38	33	44	37	32	43	37	32	30
0.8		57	48	42	56	47	41	53	46	41	52	45	40	38
1		65	56	50	63	55	49	61	54	48	59	52	48	45
1.25		72	64	58	71	63	57	68	61	56	65	60	55	52
1.5		78	70	64	77	69	63	73	67	62	70	65	61	57
2		87	80	74	85	78	73	81	76	71	78	73	69	65
2.5		92	86	81	90	84	80	86	81	77	82	78	75	71
3		96	91	86	94	89	85	90	86	82	86	82	79	75
4		101	97	93	99	95	91	94	91	88	90	87	85	80
5		104	101	97	102	98	95	97	94	91	93	90	88	83

