


姿図



品 番	LZD-92286AW
光 源	LED 24W 3500K
定格光束	2010.0 lm
1/2照度角	57°
ビーム角	68°

器具効率	100.0	%	反射率 (%)	天井	80			70			50			30			0
上方光束	0.0	%		壁	50	30	10	50	30	10	50	30	10	50	30	10	0
下方光束	100.0	%		床	20			20			20			20			0
			室指数	照 明 率 (× 0.01)													
			0.6	79	75	71	79	74	71	78	74	71	77	73	71	69	
器具間隔 最大限 (取付高さH)	A	1.09 H	0.8	86	81	77	85	80	77	84	80	77	82	79	76	74	
	B	1.09 H	1	91	87	83	91	86	83	89	85	82	87	84	82	80	
			1.25	96	92	88	95	91	88	93	90	87	91	88	86	84	
保 守 率			1.5	100	95	92	98	95	92	96	93	90	94	91	89	86	
	良	0.67	2	105	101	99	103	100	98	101	98	96	98	96	94	91	
	中	0.63	2.5	108	105	103	107	104	102	103	101	100	101	99	98	94	
			3	111	108	106	109	107	105	106	104	102	102	101	100	96	
	否	0.56	4	113	111	110	111	109	108	107	106	105	104	103	102	98	
			5	115	113	112	112	111	110	109	108	107	105	104	104	99	

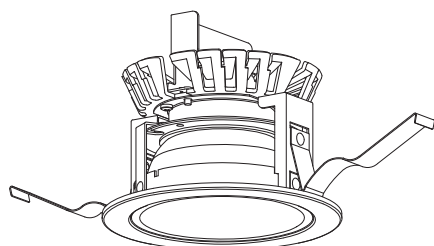