


姿図

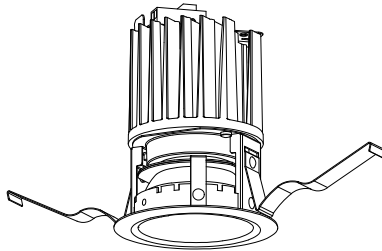

品番	LZD-92903LW
光源	LED 15W 2700K
定格光束	1030.0 lm
1/2照度角	37°
ビーム角	40°

器具効率	100.0 %
上方光束	0.0 %
下方光束	100.0 %
器具間隔 最大限 (取付高さH)	A 0.67 H
	B 0.67 H
保守率	良 0.67
	中 0.63
	否 0.56

反射率 (%)	天井			壁			50			30			0		
	80	70	50	30	10	50	30	10	50	30	10	50	30	10	
室指数	照明率 (×0.01)														
0.6	81	76	73	80	76	73	79	75	73	79	75	72	71		
0.8	87	82	78	86	81	78	85	81	78	83	80	77	76		
1	92	87	84	91	87	84	89	86	83	88	85	82	80		
1.25	96	92	89	95	91	88	93	90	87	91	89	86	84		
1.5	100	96	92	98	95	92	96	93	90	94	91	89	87		
2	105	101	98	103	100	98	100	98	96	98	96	94	91		
2.5	108	105	103	106	104	102	103	101	100	101	99	97	94		
3	111	108	106	109	107	105	106	104	102	102	101	100	96		
4	113	111	110	111	110	108	107	106	105	104	103	102	98		
5	115	113	112	113	111	110	109	108	107	105	104	104	99		

